


mille SERIES **RB**Y1025 **RB**Y1030 **RB**Y1040

HEAVY OIL

PNEUMATIC ATOMIZATION WITH ELECTRONIC OPERATION
 with viscosity up to 4000 cSt at 50°C (530°E at 50°C)

TECHNICAL DETAILS

Type	Model	Output kW		Auxiliary electrical power supply	Motor electrical power supply	Fan motor kW	Pump motor kW	Resistor kW	Noise level dBA
		min.	max.						
RB Y1025	H-.xx.S.xx.A.xx	2.550	8.700	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	18,5	0,75	24	82,2
RB Y1030	H-.xx.S.xx.A.xx	2.550	10.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	22,0	1,10	18+18	85,6
RB Y1040	H-.xx.S.xx.A.xx	2.550	13.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	30,0	1,10	24+24	85,6

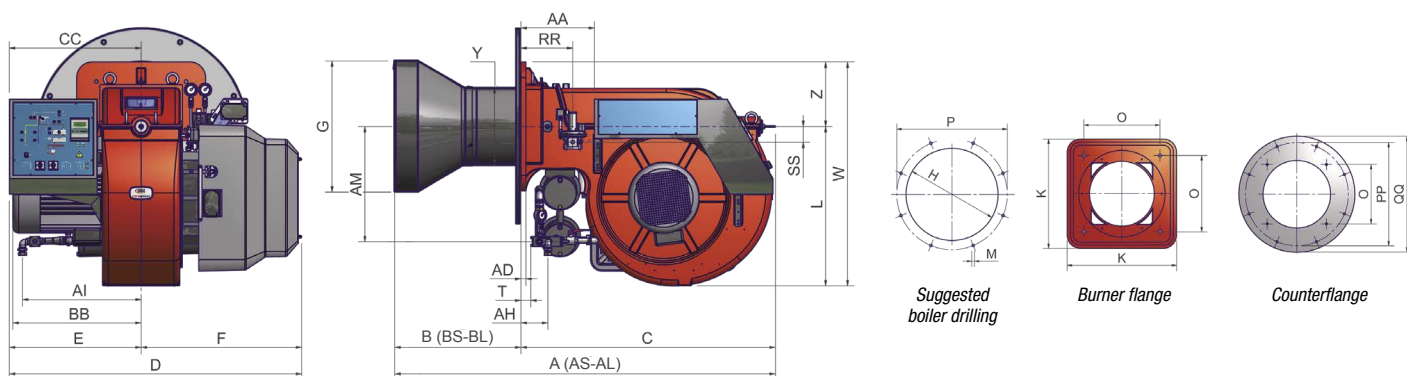

Low pressure pump set (pump, motor and filter) is included, but supplied loose (not assembled on the burner).

Type	Packaging dimensions (mm)			
	l	p	h	kg
RB Y1025/1030/1040	2.280	1.730	1.360	850

Approximate values

Type	Model	Overall dimensions (mm)																			
		AA	AS	AL	AD	AH	AI	AM	B	BB	BS	BL	C	CC	D	E	F	G	H	K	L
RB Y1025	H-.xx.x.xx.A.xx	377	1669	1865	25	304	465	335	410	641	376	572	1293	680	1502	680	822	474	524	660	816
RB Y1030	H-.xx.x.xx.A.xx	377	1646	-	25	138	608	589	353	657	353	-	1293	680	1502	680	822	633	693	660	816
RB Y1040	H-.xx.x.xx.A.xx	377	1654	1873	25	138	608	589	361	657	361	580	1293	680	1502	680	822	671	731	660	816

Approximate values

The dimensions B are reduced by 25 mm with counterflange and gasket.